



VOICE PATCH PANELS

Technical information



Features:


- ◆ 25 and 50 port variants
- ◆ 3 pairs per port terminated
- ◆ Horizontal punchdown design
- ◆ LSA punchdown
- ◆ Integral cable strain relief facility
- ◆ Fully flat front fascia
- ◆ 25 year Ultima System Warranty

Materials

Panel	SPCC, 1.2mm thick, black
RJ45 Jack Housing	ABS, UL94V-0
RJ45 Jack Contact	Phosphor bronze, nickel plated, finished with 6µ gold plating on plug contact area
IDC Housing	Polycarbonate, UL92V-0
IDC Contacts	Phosphor bronze, tin plated
Earth Wire	18AWG, Green/Yellow sheath, 40cm

Performance

Insertion Force	9N max.
Retention Strength	7.7kg between Jack and Plug
Operating Temperature	-40°C to 80°C
Mating Cycles	750 cycles min.
IDC Wire Range	22-26 AWG solid wire. Compatible with LSA punchdown tools

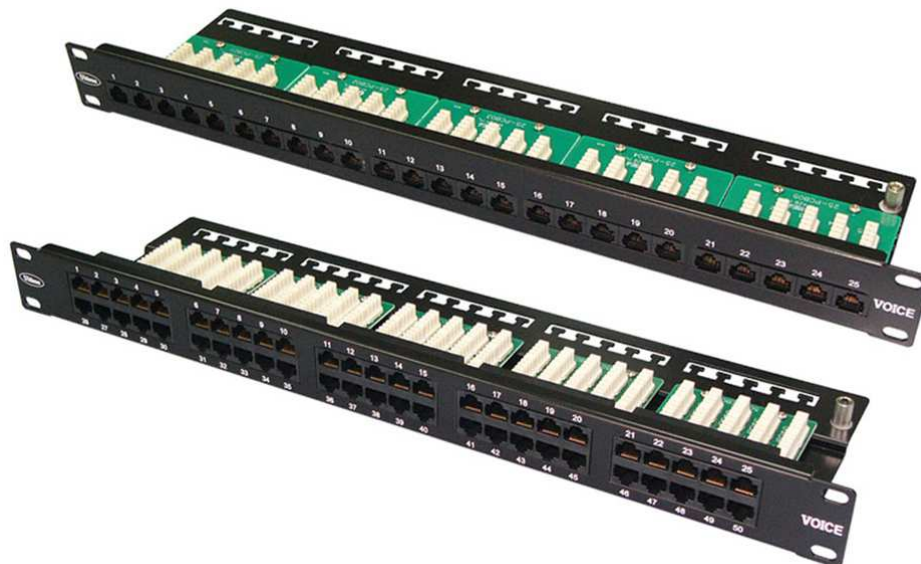

Part Numbers

Item	Description	Type	Ports	Height
777968	Voice Patch Panel	3 Pair	25 Port	1U
774192	Voice Patch Panel	3 Pair	50 Port	1U