

CW1128/1198 SWA EXTERNAL CABLE

Technical information




Features:

- ◆ Suitable for direct burial
- ◆ Steel wire armouring
- ◆ Black, UV resistant PE sheath
- ◆ Designed for IDC terminations
- ◆ 0.50mm solid copper conductors
- ◆ Available with different numbers of pairs
- ◆ Petroleum jelly flooded for prevention of moisture ingress

Technical Specifications

Conductor Diameter (mm)	Insulation Diameter (mm)	Max. Conductor Resistance Ω/km @ 20°C	Capacitance Unbalance pF
0.50	0.90	91.0	≤ 275

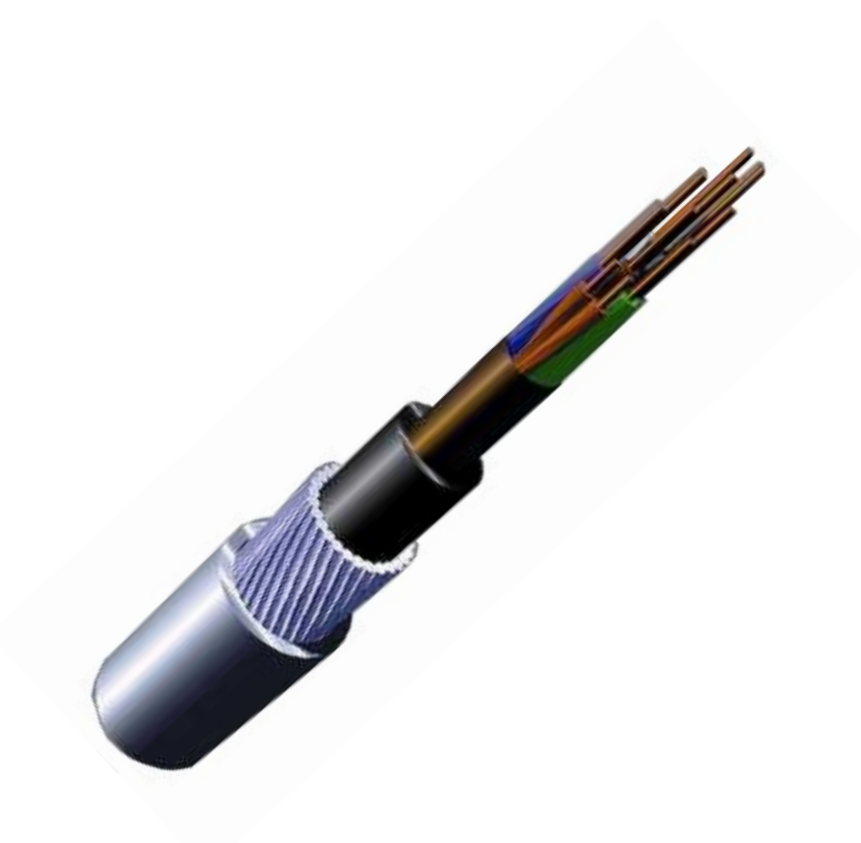

Part Numbers

Item	Description	Pairs	Overall Dia.	Cable Weight	Reel Length	Colour
771709	Cable CW1128/1198 SWA External	5	13.2mm	188kg/km	Per metre	Black
771710	Cable CW1128/1198 SWA External	10	14.7mm	252kg/km	Per metre	Black
777101	Cable CW1128/1198 SWA External	20	16.5mm	357kg/km	Per metre	Black
802627	Cable CW1128/1198 SWA External	25	17.2mm	412kg/km	Per metre	Black
770435	Cable CW1128/1198 SWA External	50	23.3mm	964kg/km	Per metre	Black
778746	Cable CW1128/1198 SWA External	100	29.0mm	1,453kg/km	Per metre	Black