


SUBMERSIBLE PUMP 3A 110V

Technical Information

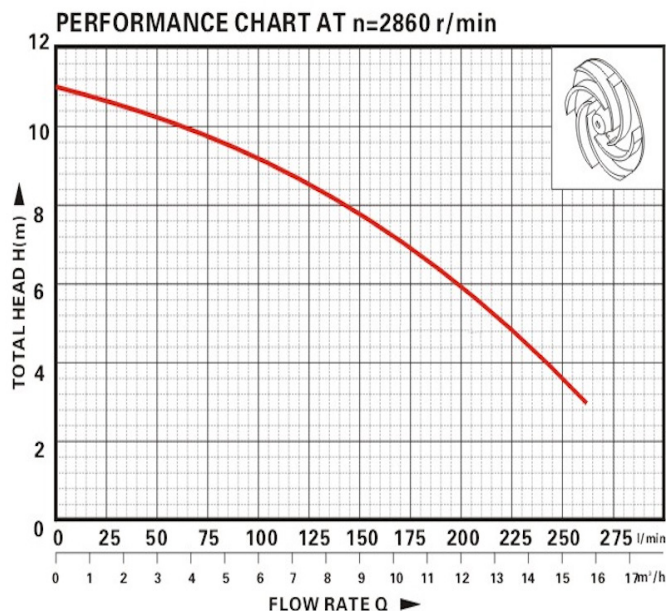

Compact in size, light in weight and easy to use. This pump is perfect for telecoms engineers looking to remove excess water from below-ground chambers. The unit is supplied with a float switch which can automatically control the on/off functions. A protector within the motor can automatically cut off the power when overheating or overloading, helping sustain the pump's reliability in harsh environments.

Part Number - 795634

Description - Submersible Pump 3A 110V

Specification

Power - 0.45Kw

Outlet Diameter - 50mm

Voltage - 220/50 V/Hz

Max.flow - 260 l/min

Max.head - 11mm

G.W - 11Kg


Dimensions - 23cm x 23cm x 35cm

Condition of Usage

- 1) Maximum operating depth 5mm in below water level
- 2) Maximum fluid temperature 40°C
3. PH value in water: 6.5 - 8.5
- 4) Maximum passage for suspended solids 0.2mm

SUBMERSIBLE PUMP 3A 110V

Technical Information

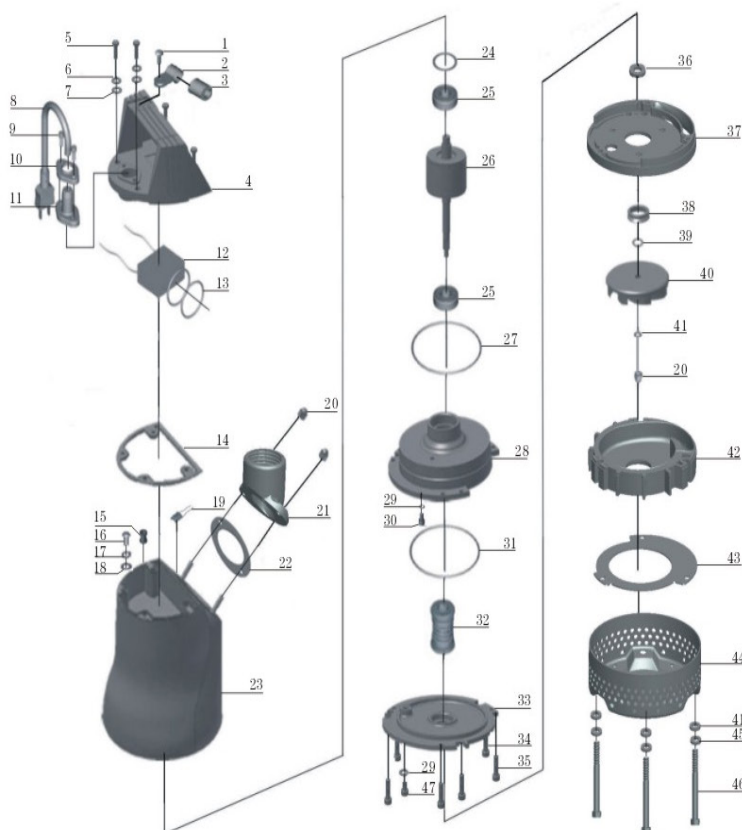

NO.	Description	Material	NO.	Description	Material
1	Screw	0Cr18Ni9	25	Bearing	
2	Cable Presser	0Cr18Ni9	26	Rotor	
3	Protector	Rubber	27	"O" Ring	Rubber
4	Handle	ZL102	28	Oil Chamber	ZL102
5	Bolt	0Cr18Ni9	29	"O" Ring	Rubber
6	Spring Washer	0Cr18Ni9	30	Bolt	0Cr18Ni9
7	Washer	0Cr18Ni9	31	Rubber Washer	Rubber
8	Cable		32	Mechanical Seal	Graphite to Ceramic
9	Screw	0Cr18Ni9	33	Oil Chamber Cover	ZL102
10	Flange	0Cr18Ni9	34	Screw	0Cr18Ni9
11	Cable Protector	Rubber	35	Screw	0Cr18Ni9
12	Capacitor		36	Oil Seal	
13	"O" Ring	Rubber	37	Pump Seat	Nitrile Rubber with stainless steel in sent
14	Gasket	Rubber	38	Lip Seal	Rubber
15	Line Protector	Rubber	39	Washer	0Cr18Ni9
16	Screw	H62	40	Impeller	Rubber
17	Spring Washer	65Mn	41	Washer	0Cr18Ni9
18	Washer	0Cr18Ni9	42	Pump Casing	Polyethylene
19	Thermal Protector		43	Pump Cover	Lcr17Ni7 (301)
20	Nut	0Cr18Ni9	44	Filter Mesh	Q235A Spout Plastic
21	Outlet Connector	ZL102	45	Spring Washer	0Cr18Ni9
22	Gasket	Rubber	46	Bolt	0Cr18Ni9
23	Stator	ZL102	47	Bolt	0Cr18Ni9
24	Undulated Washer	65Mn			