


PDU specification drawing

1-Phase 230V 32A switched PDU : C13 x 16 + C19 x 4

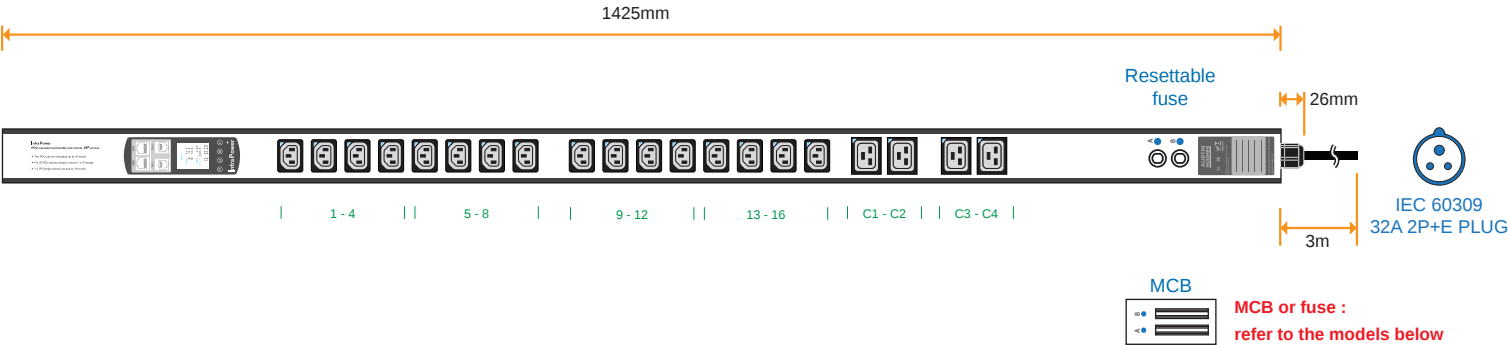

32A model :	Fuse	MCB
V16C13/4C19-32A-WS/F_EN/3B-1	2	-
V16C13/4C19-32A-WS/CR_EN/3B-1	-	2

Input Rating : 32A, 230V
Inlet : 32A IEC60309 2P+E plug
Cordset : 3 meter 4mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit Details : < **Circuit A** > Output 16A max. C13 #1-8 + C19 #C1-C2
< **Circuit B** > Output 16A max. C13 #9-16 + C19 #C3-C4

Single phase switched PDU

Outlet : 10A Rated IEC320 C13 x 16
16A Rated IEC320 C19 x 4

AUSTIN HUGHES®
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.
Copyright 2018 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (WS Switched PDU)

Local Display : Field replaceable 1.8" color LCD
Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
Outlet Control : Outlet Switch ON / OFF
Accuracy : ±1% true RMS
IP Access : via IP dongle, one IP Access up to 16 PDU Levels
Cascade : Up to 16 PDU under single IP address via IP dongle
SNMP : via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance : FCC & CE certified
Safety Compliance : CE / LVD certified
Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Dimension : 60 (W) x 90 (D) x 1425 (H) mm
Material : Extrusion
Color : Black